

FEATURES

- All bronze construction
- Corrosion resistant
- Straight stream to fog
- Changeable flow rate
- Easy to maintain and clean

Application

Ideal to use in connection with portable or fixed monitors due to their remarkable strengths and adjustable discharge pattern.

Recommended foam concentrates

The following foam concentrates can be used in combination with Uller:

- AFFF 1%, 3% or 6% *
- AFFF ARC 3x6
- AFFF ARC 3x3

* not on polar solvents.


Operation

The Uller nozzles are fitted with a 2½" female thread, suitable for monitor Siv or any other monitor with 2 ½" water outlet. After using foam solution, clean it with water.

By turning the handles, the discharge pattern can be adjusted from straight stream to fog. Flow will remain the same regardless of spray pattern.

Optional

- Other inlet thread
- Other materials
- Self-inducting version

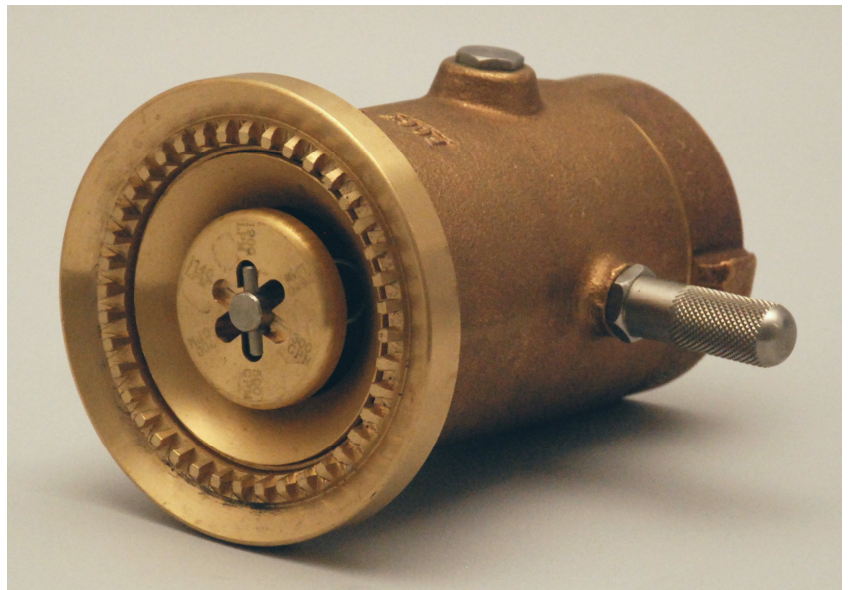

Uller nozzles are especially designed for Siv monitors or any other monitor with 2½" water outlet. The nozzles are suitable for water and foam solutions. They are manufactured in rugged brass.

The discharge pattern is adjustable from fog to straight stream during operation. Flow rate can be changed in between use.

Technical data

Flow rate	1100 / 1900 / 2700 lpm
Nominal pressure	7 bar
Inlet	2 ½" BSP FM (standard)
Material	Bronze
Length	185 mm
Weight	7 kg
Part no.	20-3601-19