

### FEATURES

- High foam quality
- Homogenous foam distribution caused by optimal piping
- Stainless steel
- Compact
- Excellent also for water-application
- Long throw range



### Application

The Frigg branchpipe is used in connection with fixed monitors or at fire trucks.

### Recommended Foam Concentrates

- Fluoroprotein 3% or 6%
- Protein 3% or 6%
- FFFP 3% or 6%
- AR-FFFP 3x6 or 3x3
- AFFF 1%, 3% or 6%
- AR-AFFF 3x6 or 3x3
- Multi purpose foam

### Options

The Frigg branchpipe is available with the following options:

- A deflector for gentle application.
- Stortz coupling
- BS-coupling

### Operation

The Frigg can easily be attached to the monitor outlet. The mixing of foam has to be done before the water reaches the monitor. Using only water the branchpipe gives also an excellent result.


The Frigg branchpipe is developed to match the compact measurements of the Balder monitors. A unique design of the branchpipe's interior allows the creation of superior foam quality.

There are several tubes inside the branchpipe in which the water/foam stream is separated. The air inlet in the stream results a homogenous foam. This allows also the branchpipe to be relatively short, as there is no need to work the foam after the separating point.

### Technical data Frigg-L 3000

Operating pressure	8 bar
Flow rate	3,000 lpm
Inlet	2½" BSP FM thread
Approx. expansion rate	4-5
Length	760 mm
Weight	4.2 kg
Part no.	20-5100-03

### Throw range Frigg-L 3000

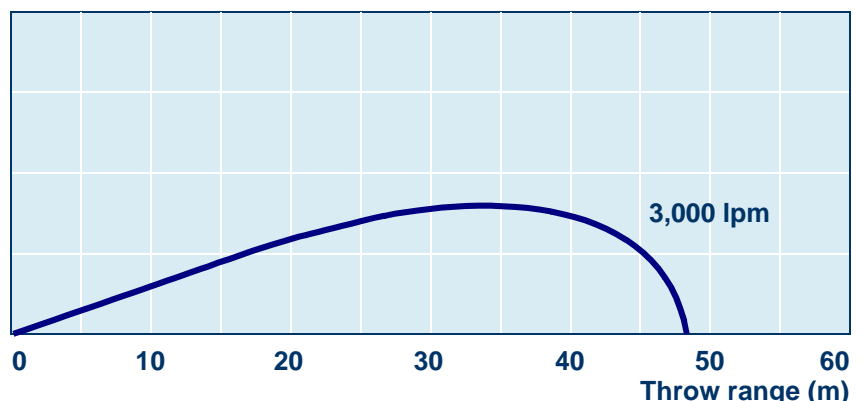

### Quality Control and tests

Frigg-L are manufactured according to the draft European Standard EN-13565-1, and CE marked.