

FEATURES

- **Fixed proportioning ratio 1%, 3% or 6%**
- **Water flow 200 -20,000 lpm**
- **Between flange construction**
- **Suitable for ARC foam concentrates**
- **Easy to install**
- **Accurate balance valve**

Application

Fixed foam systems where a variable flow rate can occur, such as in sprinkler systems or multiple deluge systems.

Recommended Foam

All types of foam concentrates with induction rates of 1%, 3% or 6% can be used. For ARC (alcohol resistant) foam concentrate a special calibration is necessary and should be mentioned when ordering.

Operation

The WRP 10" FP is designed to work with Foam Pumps and can be installed horizon-tally or vertically with a minimum pipe length of 5 times the diameter before and 3 times after the WRP. The foam inlet is connected to the foam pump. The operating temperature should be above 0°C.

The proportioning ratio is constant over the whole flow range.

Key Data


The Wide Range Proportioner, WRP, for Foam Pumps offers an exact pre-settled proportioning ratio of 1%, 3% or 6% over a wide water flow range between 200 lpm and 15000 lpm. The maximum pressure loss is not more than 2,8 bars at 12000 lpm flow. The foam inlet is equipped with a non-return valve to prevent water from going back into the storage tank.



Technical Data

Model	WRP 10" FP
Size	DN 250
Foam inlet female	R 2 1/2"
Flow range	200 – 20 000 lpm
Proportioning rate (pre-calibrated)	1%, 3% or(6%**)
Inlet pressure (max)	16 bar
Inlet pressure (min)	5 bar
Pipe length upstream	2500 mm,
Pipe length downstream	2500 mm
Flange type	DIN PN16
Between flange proportions	100 mm
Height	530 mm
Weight	73 kg
Material	Bronze,Compatible with all foam concentrate

Pressuredrop
BAR

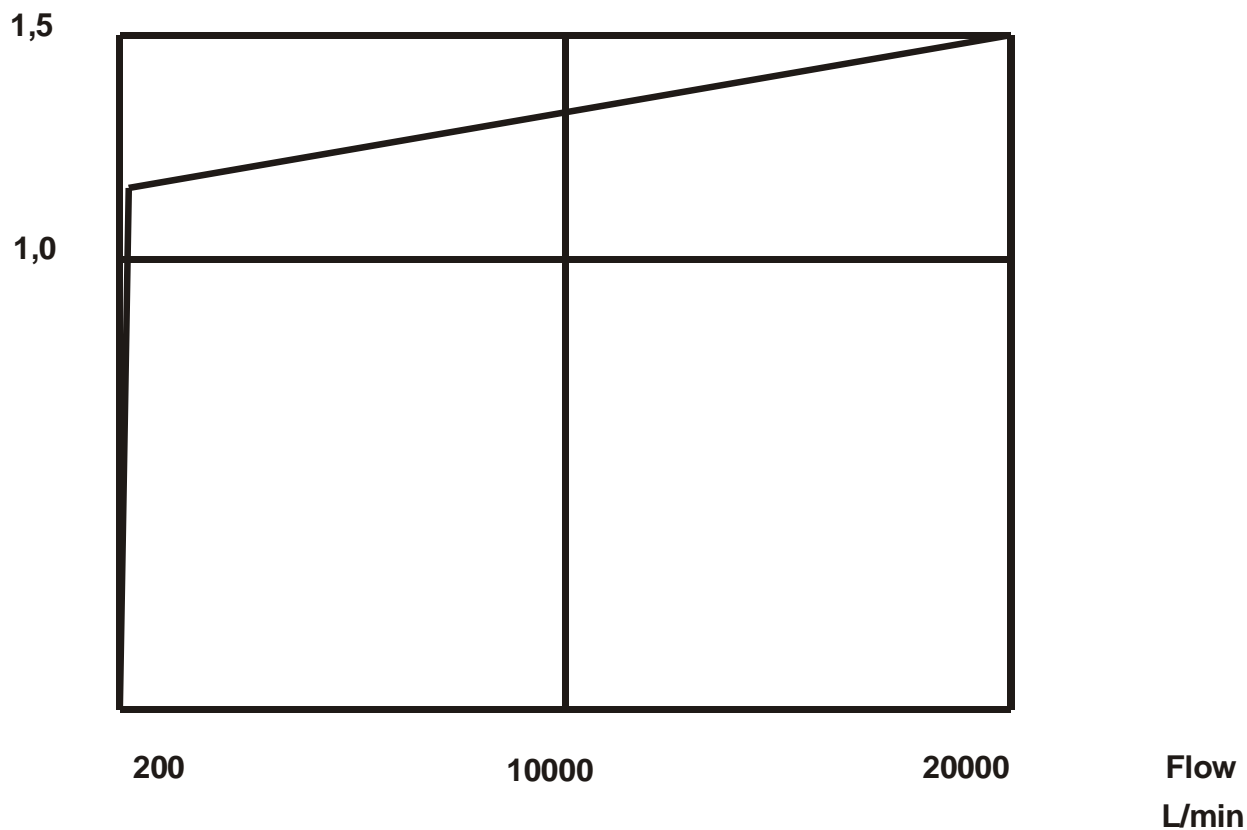

Proportioning

