



FORM 1

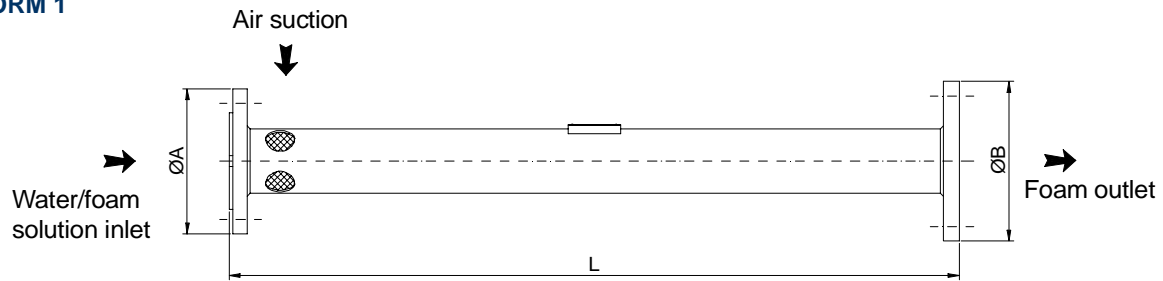

FORM 2

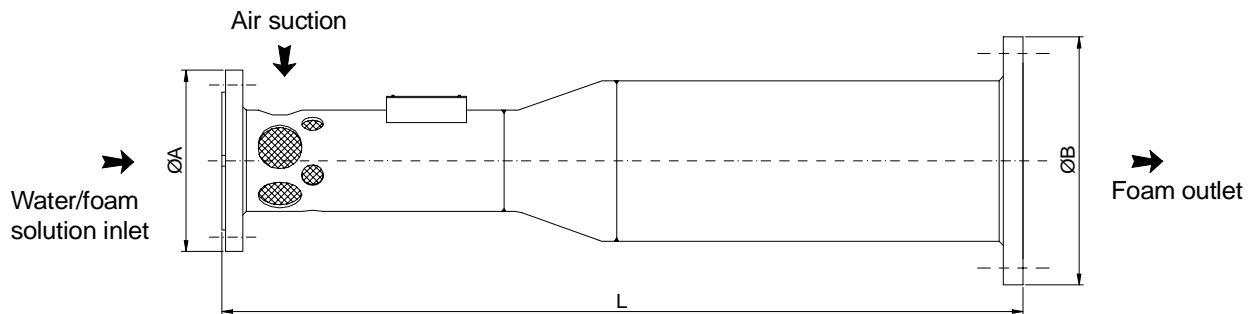

CONSTRUCTION FEATURES

Body and flanges material: carbon steel

Detachable calibrated orifice material: stainless steel

Finish: red epoxy paint (RAL 3000)

OPTIONAL

Body and flanges material: stainless steel (AISI 304 / AISI 316)

Hot dip galvanized

MODEL	FORM	øA	øB	LENGTH	FLOW RATE at 5 bar	FOAM PRODUCTION at 5 bar ^{(1) (2) (3)}	WORKING PRESSURE	WEIGHT
2	1	2"	3"	705 mm	200 l/min	1.200 l/min	5 - 16 bar	10 kg
4	1	2"	3"	705 mm	400 l/min	2.400 l/min	5 - 16 bar	10 kg
8	1	3"	4"	⁽⁴⁾ 1.005 mm	800 l/min	4.800 l/min	5 - 16 bar	15 kg
12	1	4"	6"	1.103 mm	1.200 l/min	7.200 l/min	5 - 16 bar	25 kg
16	1	4"	6"	1.103 mm	1.600 l/min	9.600 l/min	5 - 16 bar	25 kg
20	1	4"	8"	1.103 mm	2.000 l/min	12.000 l/min	5 - 16 bar	28 kg
24	2	5"	8"	1.103 mm	2.400 l/min	14.400 l/min	5 - 16 bar	50 kg
32	2	5"	8"	1.103 mm	3.200 l/min	19.200 l/min	5 - 16 bar	50 kg

⁽¹⁾ Expansion ratio 1:6 at 5 bar

⁽²⁾ The expansion ratio understands with fresh air, or different indication of foam producer.

⁽³⁾ Depending on foam concentrate type.

⁽⁴⁾ DIN / UNI version. ANSI version: L=1027

Ve is one of ancient Scandinavian gods and, together with Odin and Vili, the son of the primordial pair of giants Bor and Bestla. The three brothers created heaven and earth from the slain body of the primeval being Ymir and built the twelve realms. They also created Ask and Embla, the first pair of humans.